

F15

COMPOSITE FINISH NAIL



F15 SERIES FINISH NAIL

VERSATILITY IS THE BENCHMARK OF THIS FASTENER SERIES. WITH ITS ABILITY TO INTERFUSE BY FRICTION WITH THE MATERIAL ITS BEING DRIVEN INTO, THE F15 NAIL CAN PROVIDE UP TO 2X THE HOLDING POWER VERSUS SIMILAR SIZED STEEL NAILS WITH ONLY 10MM PENETRATION INTO THE SUBSTRATE MATERIAL. NO NEED TO USE LONGER MORE EXPENSIVE NAILS TO ACHIEVE MAXIMUM HOLDING POWER.

THE THERMOPLASTIC RESIN AND FIBERGLASS MATERIAL COMPOSITION ALLOWS FOR A FIRMLY FIXED APPLICATION WITH EXCEPTIONAL HOLDING WHILE OFFERING THE ADDITIONAL BENEFITS OF WORKABILITY, SANDING BELT, ROUTER BIT AND SAW BLADE SAFE, NO CORROSION OR RUSTING, AND REDUCED SET UP AND TEAR DOWN TIME FOR MOST APPLICATIONS.

| ITEM | LENGTH | QTY. PER BOX |
|--------|---------------|--------------|
| F15-12 | 1/2" (12mm) | 2,000 |
| F15-15 | 5/8" (15mm) | 2,000 |
| F15-19 | 3/4" (19mm) | 2,000 |
| F15-25 | 1" (25mm) | 2,000 |
| F15-32 | 1 1/4" (32mm) | 2,000 |
| F15-38 | 1 1/2" (38mm) | 2,000 |



APPLICATIONS

- CABINETS
- CASE GOODS
- DECORATIVE TRIM
- DOOR CASINGS
- FURNITURE
- MOLDING
- SASH & MILLWORK
- WINDOW CASINGS
- CNC SPOILBOARD NAILING
- WOOD BOAT BUILDING
- PVC MILLWORK AND TRIM


FASTENER SPECIFICATIONS

GAUGE: 15

FASTENERS PER STRIP: 50

FASTENER RANGE: 1/2", 5/8", 3/4", 1", 1 1/4", 1 1/2"

MATERIAL: Thermoplastic Resin and Fiberglass

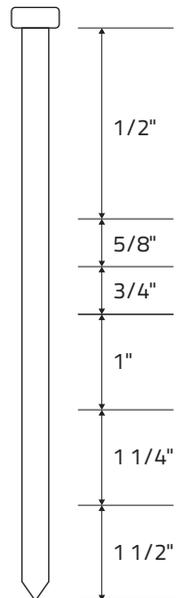

Red Hawk Fasteners, Inc.

7302 Cessna Drive • Greensboro, NC 27409

Phone/Fax 336.252.5328 • info@redhawkfasteners.com

redhawkfasteners.com

FN/15S

FINISH NAILER



STAPLER SPECIFICATIONS

MAGAZINE: Side load

FASTENER SIZES: F15 series (1/2", 5/8", 3/4", 1", 1 1/4", 1 1/2")

MAGAZINE CAPACITY: 50 nails

MAXIMUM OPERATING PRESSURE: 90 psi

WEIGHT: 3.0 lbs., 2 oz.

Meets the demands of industrial and construction professionals with adjustable depth of drive convenience, EZ-Clear front nose, no-mar front nose tip, adjustable exhaust, and a well balanced ergonomic design for ease of operation. A great companion for heavy duty applications.

